

Humbuckers

Video Isolation Transformers




Data Sheet

Humbuckers are common mode chokes that offer high impedance to common mode currents to ground, while being ideally transparent to line to line signals.

Unlike North Hills "Humstoppers", they have a limitation on the 60 Hz common mode signal that can be handled. Also the degree of isolation at 60 Hz is of the order of 40-50 dB compared to 120 dB for Humstoppers.

*North Hills Application Note 153 - "Ground Isolation in Video Transmission" provides further information on the subject of video isolation transformers.

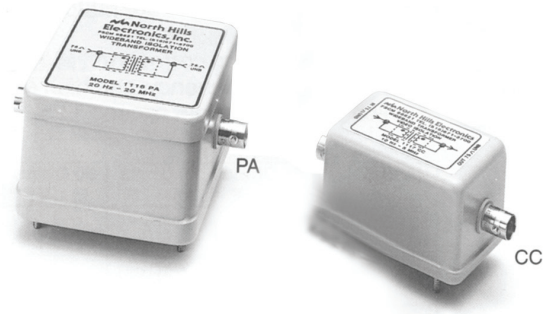

North Hills Isolation Video Transformers provide quick, cost-effective solutions.


Features:

- Flat response down to dc
- Ultra-wide bandwidth


Benefits:

- Unbalanced to unbalanced transformers for isolation of coaxial systems
- Excellent differential gain and phase

Typical Characteristics: (Model 1119PA)

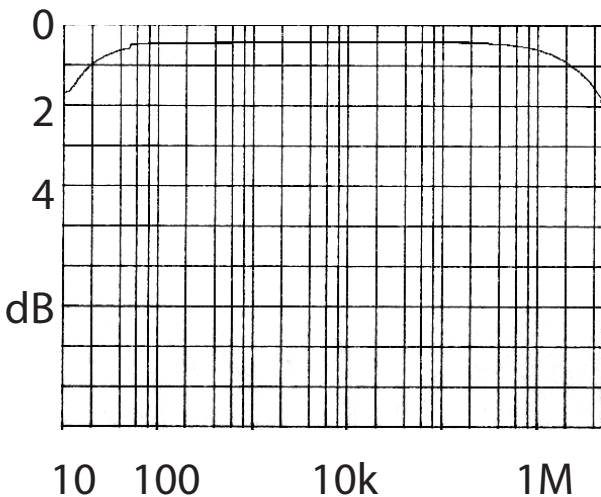

Insertion Loss
10 Hz - 5 MHz

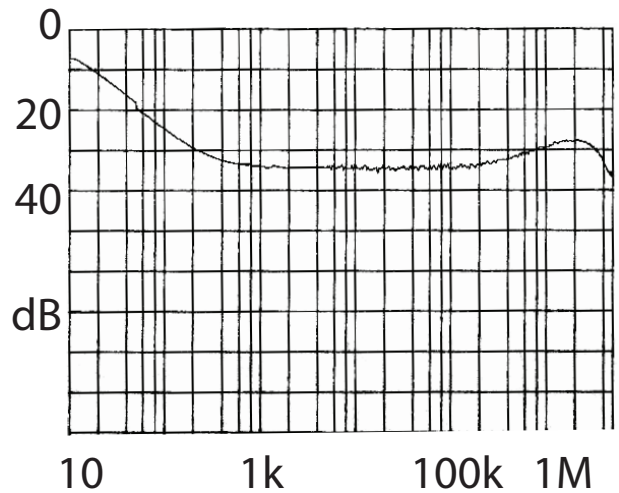

Return Loss
10 Hz - 5 MHz




For more information: www.BTTC-Beta.com/Humbuckers

Technical Drawings


Case Styles

TYPE PA, CC

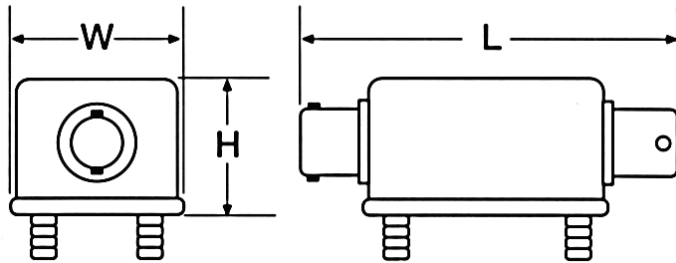

Schematics

CASE PA, CC



Case Dimensions							
Type	W (in.)	L (in.)	H (in.)	Mfg. Ctrs. A B		Stud Size	Recm. Mtg. Hole
PA	3.0	3.9	2.0	1.90	2.30	6-32 x .37	.173
CC	1.7	3.5	1.55	1.00	1.50	6-32 x .37	.173

Specifications

Model #	Impedance (Ω)	Bandwidth (MHz)	Isolation at 60 Hz (dB)	Max Com. Mode Signal at 60 Hz (V_{pp})
0019PA	50:50	dc - 20	50	3.6
0020CC	50:50	dc - 25	40	2.0
1119PA	75:75	dc - 20	50	3.6
1120CC	75:75	dc - 25	40	2.0

Flat response down to dc

Ultra-wide bandwidths

Ordering Information

With the exception of the power dividers/combiners and hybrid transformers North Hills standard product wideband transformers are a four digit number with a two letter suffix. The four digit number defines the electrical designs while the two letter suffix defines the case size.



The information in this Brochure is believed to be accurate; however, no responsibility is assumed by Beta Transformer Technology Corporation for its use, and no license or rights are granted by implication or otherwise in connection therewith. Specifications are subject to change without notice.

For ordering assistance and technical support,

E-Mail: service@BTTC-Beta.com

Visit: BTTC-Beta.com    Data Device Corporation

Call: HQ, N.Y., U.S.A (631) 224-7393

UK +44-(0)1635-811140

France +33-(0)1-41-16-3424

Germany +49-(0)89-1500-12-11

Japan +81-(0)3-3814-7688

Asia +65-6489-4801

India +91 80 46797 0368

